
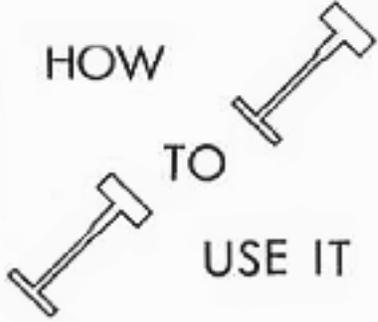
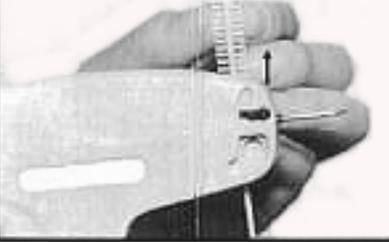
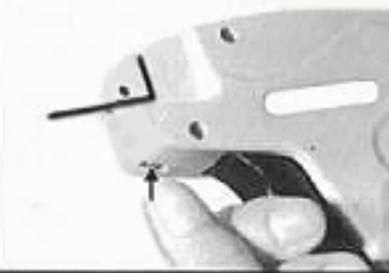
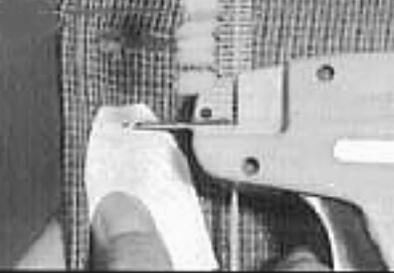


American Retail Supply Assembly Instructions

Taggers and Fasteners
5510D, 5510, 5520D, 5520

<p>HOW TO USE IT</p> 	 <p>To take out fastener clip squeeze trigger, hold squeezed, pull fastener clip up.</p>	 <p>To insert or remove needle, turn needle, lock in the direction shown.</p>
 <p>Insert either end of the fastener clip while holding trigger squeezed</p>	 <p>When not in use, protect the needle by covering it with cap.</p>	 <p>When changing blade, be sure to insert new blade in fully - as shown.</p>
 <p>Insert the needle through the tag hole and fabric, and press the trigger for tagging.</p>	 <p>To insert or to take out the needle, the lever (A) has to be released, as shown.</p>	 <p>FASTER / NEATER / CHEAPER /</p>

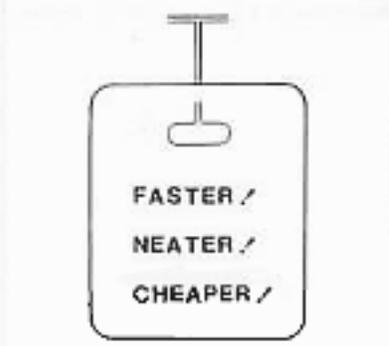